

# FLAP WHEELS LAMELLENRÄDER


## G-SAITOR SHAFT MOUNTED / MIT SCHAFT



C


■ marbles - stones - concrete - building materials

■ Marmor - Naturstein - Beton - Baumaterialien

PRODUCTS PRODUKTE	DIMENSIONS ABMESSUNGEN d x s x g (mm)	GRITS - P KÖRNUNGEN - P										ABRASIVE SCHLEIFMITTEL					
		40	60	80	100	120	150	180	220	240	320	Aluminium oxide Korund	Aluminium oxide-filled Korund mit hochaktiven Wirkstoffen	Silicon carbide Siliziumkarbid			
C																	
	60 x 20 x 6	•	•	•		•											•
	60 x 30 x 6	•	•	•		•											•
	80 x 30 x 6	•	•	•		•											•

### SAFETY REMARKS

The maximum speed marked on each product must never be exceeded.  
Maximum speed is relative to Max overhang S = 5 mm.



### SICHERHEITSHINWEISE

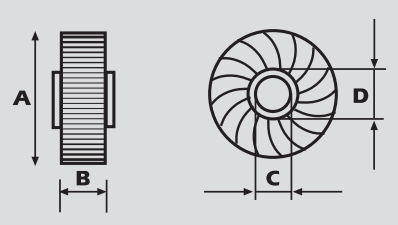
Die maximale Drehzahl jedes Produkts darf auf keinen Fall überschritten werden.  
Die maximale Geschwindigkeiten sind für einen max. Überhang S = 5 mm kalkuliert.

## F-SAITOR WITH FLANGES / MIT FLANSCHEN

C

■ marbles - stones - concrete - building materials

■ Marmor - Naturstein - Beton - Baumaterialien

PRODUCTS PRODUKTE	DIMENSIONS ABMESSUNGEN (mm)	GRITS - P KÖRNUNGEN - P												ABRASIVE SCHLEIFMITTEL						
		40	50	60	80	100	120	150	180	220	240	320	400	Aluminium oxide Korund	Aluminium oxide-filled Korund mit hochaktiven Wirkstoffen	Silicon carbide Siliziumkarbid	A	B	C	D
C	165 x 30	•	•	•	•	•	•	•	•	•	•	•	•			•	Ø 165 mm	30 mm	Ø 54 mm	Ø 78 mm

## ACCESSORIES / ZUBEHÖRE

	Ø Flap wheels mm Ø Lamellenräder mm	Ø Bore mm Ø Bohrung mm	Max available bore mm Max. Bohrung mm	Ø Coupling mm Ø Kupplung mm
FLANGES FLANSCH	165	14	32	54